

Technical Information

Oasis - Refrigerated Self-Service Island

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

DIMENSIONS / SHIPPING

Model	L"	L1"	L2"	Est Wt (lbs)
FSI660R	N/A	80.750	30.000	1,250
FSI860R	N/A	99.750	38.000	1,600

ELECTRICAL

Model	System Circuit Volts			Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
FSI660R	Remote (DX)-Type I Env	Circuit #1	110-120	1	50-60	5.00	15	15	285	2+G	Leads Single	1	3	1	N/A
	Self-Contained (R290)-Type I Env	Circuit #1	208-240	1	50-60	24.00	30	30	5,662	2+G	6-30P or L6-30P	1	1	7	17
FSI860R	Remote (DX)-Type I Env	Circuit #1	110-120	1	50-60	6.00	15	15	351	2+G	Leads Single	1	4	1	N/A
	Self-Contained (R290)-Type I Env	Circuit #1	208-240	1	50-60	24.00	30	30	5,729	2+G	6-30P or L6-30P	1	2	7	16

REFRIGERATION

Model	Zone	Section	System	Env	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION			
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)
FSI660R	All	Refrigerator	Self-Contained-R290-Type I Env	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	All	Refrigerator	Remote-DX-Type I Env	Type I	20	13,478	12,480	4.00	30.00	N/A	N/A	N/A	N/A
FSI860R	All	Refrigerator	Self-Contained-R290-Type I Env	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	All	Refrigerator	Remote-DX-Type I Env	Type I	20	14,688	13,600	4.00	30.00	N/A	N/A	N/A	N/A

INTENDED ENVIRONMENT

Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise under Env above.

WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES

Zone	Temp (°F)	Intended Use
1	40	Packaged refrigerated products-Prechilled to Warmest Avg Prod Temp.

REGULATORY

All Models	Accordance with AHRI Std 1200 ETL Listed to UL 60335-2-89 ETL Sanitation to NSF/ANSI 7
------------	--

IMPORTANT NOTES

- 1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
- 2) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 3) NOTE: Electrical specs reflect highest Amp draw using lighted shelves option




In Accordance with
AHRI Std 1200

Technical Information

Oasis - Refrigerated Self-Service Island

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

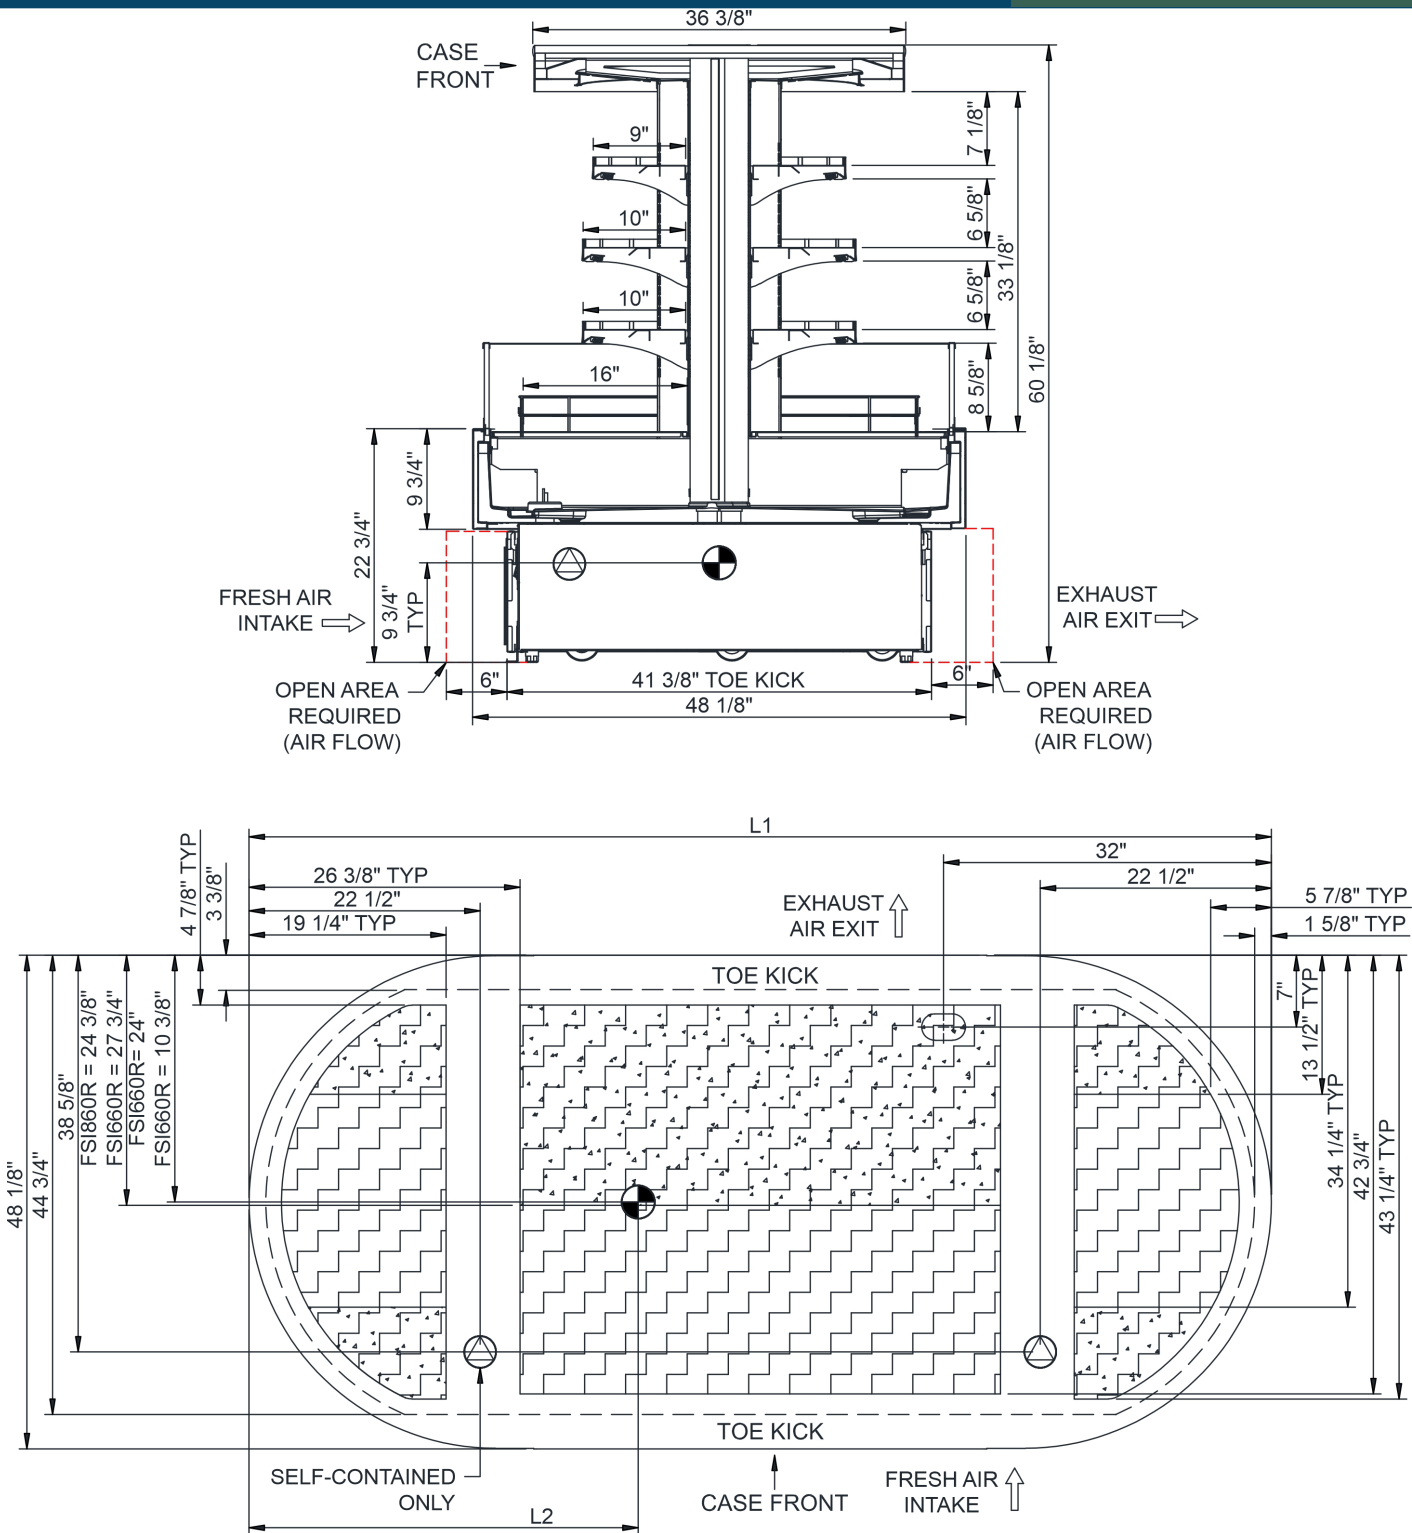

NOTE: ALL DIMENSIONS APPROXIMATE

- | | | |
|---|---|---|
|  ELECTRICAL JUNCTION BOX
(SUPPLIED WITH 6" LEADS OR POWER CORD). |  REFRIGERATION LINE CONNECTION. |  SELF-CONTAINED CASE SERVICE ACCESS AREA. |
|  LOCATION OF DRAIN TUBE FOR REMOTE REF.
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE). |  REMOTE FLOOR SINK & UTILITIES
ACCESS AREA. |  DRY CASE SERVICE ACCESS AREA. |